PERFECT

ROTARY MOWER ON SKIDS

LF

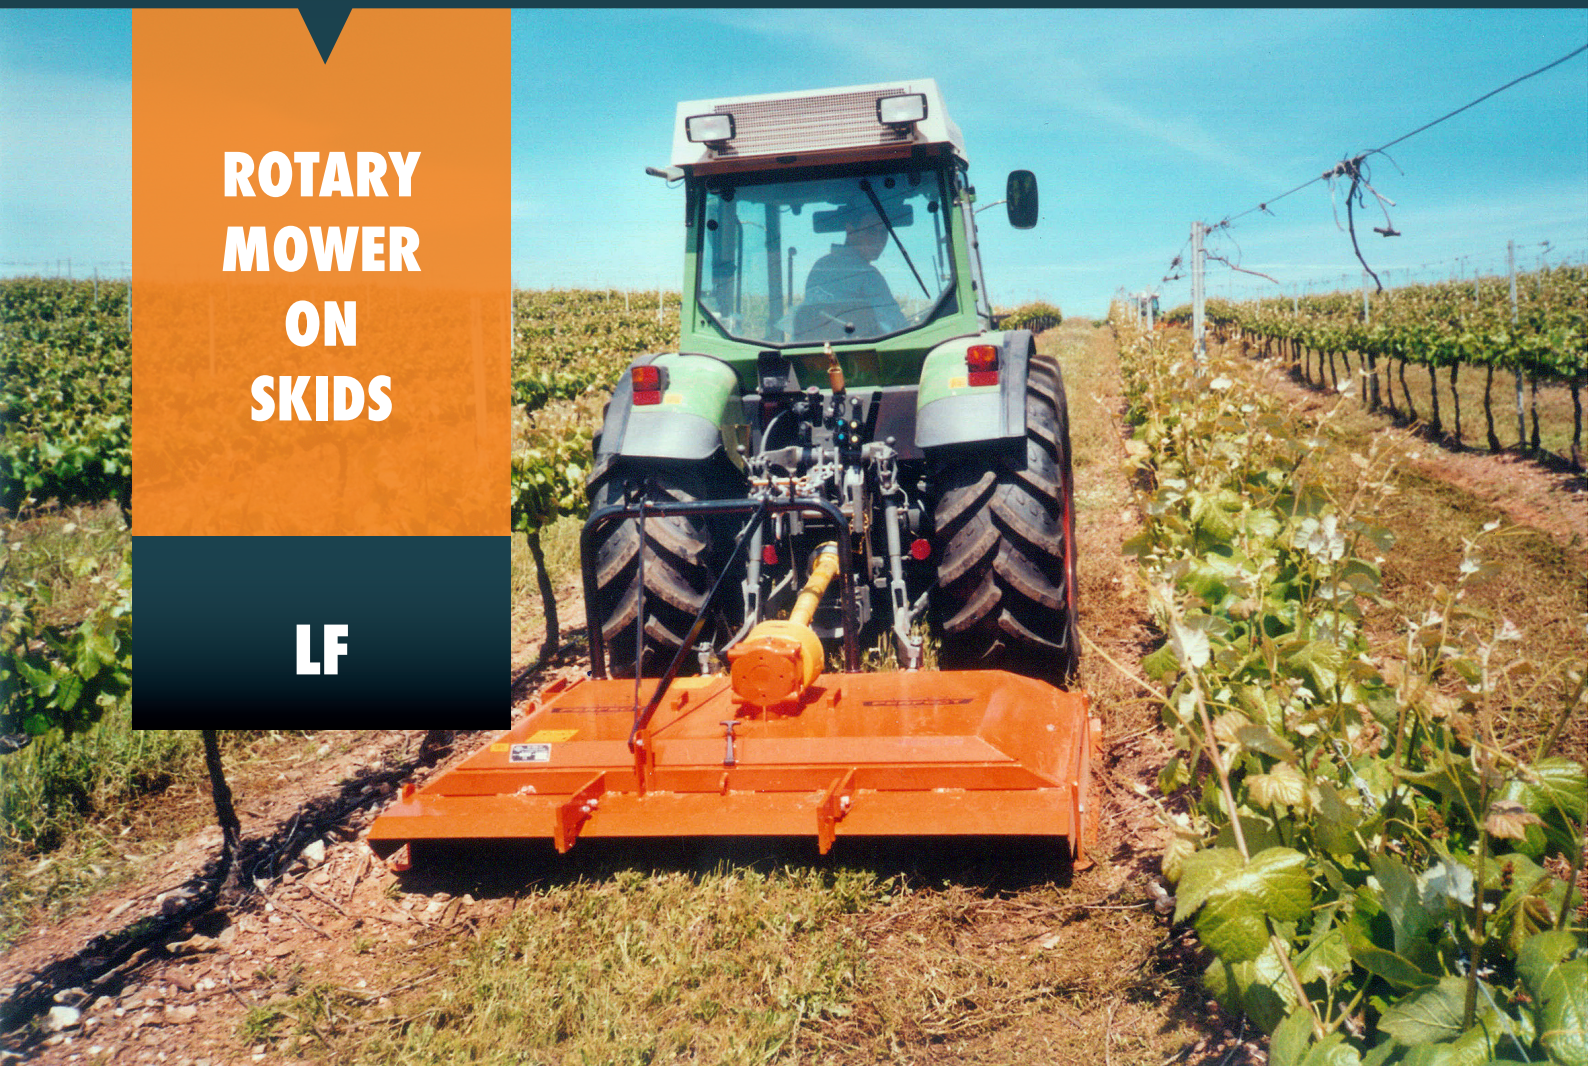

STRONG MOWER WITH A GREAT CUT

The sturdy construction of the LF mower, as well as its strong driveline make this machine a strong and straightforward and allround rotary mower.

The high turning speed of the rotors and standard mulching blades give a really nice cut, also in taller grass. Therefore this machine is also suitable for green space maintenance on air fields, campsites, etc.

Straightforward rotary mower with an excellent capacity. Easy maintenace and very long lifespan.

SERIE LF

Rotary mower on skids

LF mowers are fitted with profiled skids which are made out of forged steel. These long-lasting skids give excellent ground contour following and enable high working speeds up to 10 km/h = 6,5 mph).

All rotors are are driven by a heavy v-belt drive and most v-belts have automatic belt tensioners. This system protects the driveline and generates a high rotor speed.

EXTRA'S

- Rear roller
- Support saucers under the rotors
- Hydraulic offset (parallelogram)
- Front mount version
- Front + 3-point rear headstock
- Rubber wheel set 4.00 x 4

OFFSET SYSTEM

For easy conversion from transport to offset postion the LF Rotary Mowers come as standard with an offset sytem (except for LF-140).
A hydraulic offset feature is available as an option.

TECHNICAL SPECIFICATIONS	LF-140	LF-185	LF-215	LF-245	LF-275	LF-360
Cutting width (cm/inch)	140 / 4'7"	185 / 6'1"	215 / 7'1"	245 / 8'1"	275 / 9'0	360 / 11'10"
Min. power required at 540 rpm of pto (kW/HP)	18 / 25	21 / 28	24 / 32	28 / 38	32 / 42	39 / 50
Number of rotors	2	2	3	3	3	4
Total width (cm/inch)	149 / 4'11"	194 / 6'4"	224 / 7'4"	254 / 8'4"	284 / 9'4"	374 / 12'3"
Cutting height (cm/inch)	4-14 / 1½-5½	4-14 / 1½-5½	4-14 / 1½-5½	4-14 / 1½-5½	4-14 / 1½-5½	4-14 / 1½-5½
Length of rear roller (option, cm/inch)	53 / 21"	53 / 21"	95 / 37"	95 / 37"	95 / 37"	162 / 64"
Max. offset from centre of tractor	70 / 3'7"	140 / 4'7"	155 / 5'1"	170 / 5'7"	185 / 6'1"	230 / 7'7"
Parallelogram-type offset (option)	n.a.	133 / 4'4"	148 / 4'10"	163 / 5'4"	178 / 5'10"	223 / 7'4"
Weight (kg/lbs)	325 / 715	360 / 794	430 / 946	465 / 1020	520 / 1144	670 / 1474

As our policy is one of continuous improvement, we reserve the right to change the specification or to modifiy the desing without prior notice

Van Wamel B.V.

Van Wamel B.V.
Energieweg 1, 6658 AE
Beneden Leeuwen
The Netherlands

+31 (0) 487 59 29 44
+31 (0) 487 59 29 44
www.vanwamel.nl
perfect@vanwamel.nl

Your PERFECT dealer