



SIDE FLAIL MOWERS

NEW!



PROFESSIONAL SIDE FLAIL MOWER

ZF PRO




- For professional/intensive use on roadside verges, field edges, mowing green manure crops or maize stubble, etc.
- Extremely strong; double-skin frame in all the necessary places
- Driven through a 5 fold Powerbelt and reinforced gearbox
- A flexible rubber coupling between the gearbox and flail shaft eliminates peak strokes on the drive system
- 1000 rpm drive
- Unique, extremely reliable collision protection integrated in main frame
- 0,9 kg or 2,2 kg flails


OPTIONS:

- Hydro-lift for mowing shallow ditches with a large mowing head
- Front-mounted model and/or left hand side model
- Pro-Fix
- Various flail options (see page 21)

TECHNICAL INFORMATION	ZF-150 PRO	ZF-180 PRO	ZF-210 PRO	ZF-240 PRO
Working width (cm/feet) (A)	150 (4'11")	180 (5'11")	210 (6'11")	240 (7'11")
Speed:				
- PTO shaft (rpm)	1000	1000	1000	1000
- flail shaft (rpm)	2230	2230	2230	2230
Required power, min. (kW/ HP)*	44/60*	50/68*	55/75*	65/88**
Flails standard 0.9 kg (2.2 kg)	16 (9)	18 (12)	22 (12)	24 (16)
Transport width (cm)	187	187	187	187
Tractor coupling system (cat.)	II	II	II	II
Weight (kg/lbs)	900 / 1960	950 / 2070	1000 / 2180	1080 / 2310
Offset from tractor middle line				
- minimum (cm)	255	285	315	345
- maximum (cm)	325	355	385	415

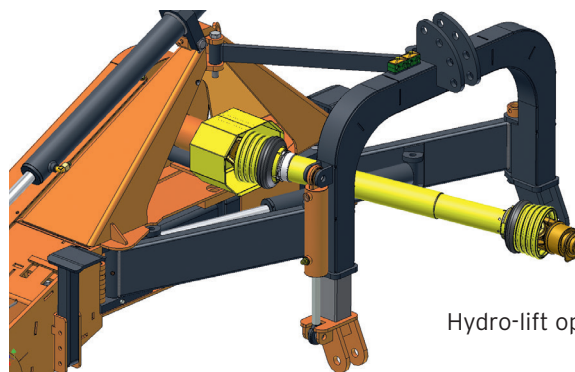

Hydro-lift option

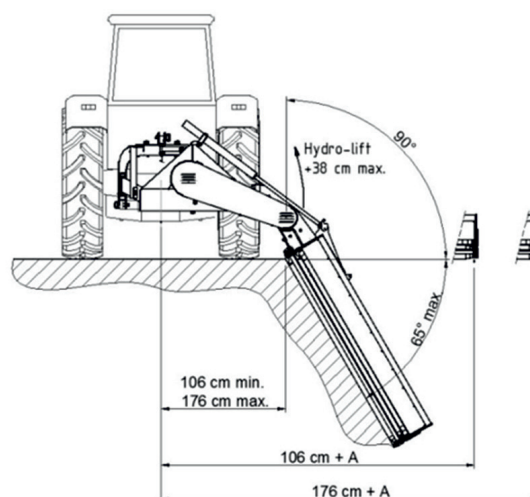

* Depending on the work to be carried out. A PTO shaft with an overload protection clutch must be used with oversized tractors.

** For a minimal level of stability a tractor of min. 58 kW / 80 hp (**69 kW/100 hp is recommended).